# **2CR5**

# LITHIUM MANGANESE DIOXIDE



#### **Features & Benefits**

- Operating temperature range between -40° C to +-70° C
- High current pulse discharge capability
- Stable voltage level during discharge
- High safety and reliability

### **Specifications**


Nominal Capacity: 1400 mAh

Nominal Voltage: 6V


Weight: Approximately 38g Operating Temperature:  $-40^{\circ}\text{C} - +70^{\circ}\text{C}^{*}$ 

\*Please consult Panasonic for use below and above -20°C to +60°C

#### **Dimensions**



## **Temperature Characteristics**

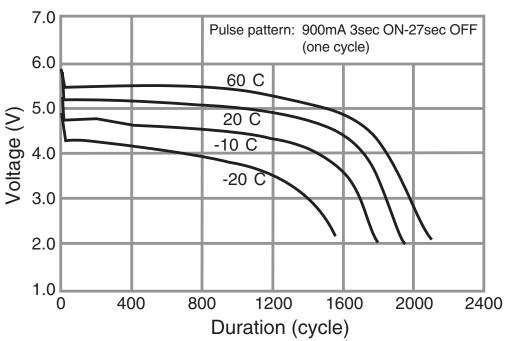

\*Please consult Panasonic for use below and above -20°C to +60°C